

MRV-8 Anti-Wrinkle Roller

The compact MRV for small webs



Feature

It is an Anti-Wrinkle Roller for small webs (the maximum web width of 650 mm). A roll outer diameter is φ 85 mm of the series minimum, and can be attached compactly.



Standard specification


Roll outer diameter	phi85mm
Roll length	A maximum 700 mm (25-mm knurl)
The maximum contact angle	Right angle
The maximum sheet speed	100m/min
The maximum tension	100N
Operating temperature range	0 ~ 80℃
Rubber quality of material	NBR (white/black), EPT (white/black)

Notes: The manufacture about the specification besides a standard is also accepted.

[About a wrinkles picking effect]

This product spread the web twisted around the perimeter by the growth of rubber. For this reason, it changes with the quality of the material (slide nature, elasticity, hardness) of a web, a size (width, thickness) and the installation requirements (arranging and twisting angle) of a roll, the environment (temperature, humidity), machine specification (line speed, sheet tension), and etc. For details, please consult.

Outline drawing

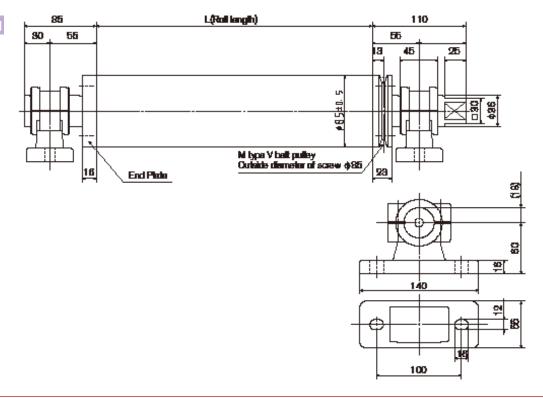



Lending "hands" to replace human hands.

www.mitsuhashi-corp.co.jp

株式会社 三橋製作所 MITSUHASHI CORPORATION

☐ Head Office/ Factory 1 Sekizan-cho Yamanouchi Ukyo-ku Kyoto

615-0082 Japan

TEL:+81-75-316-3300 FAX:+81-75-313-7595

☐ Tokyo Office/Overseas Sales Division

Yoshikuni Komagata Bldg. 9F 2-4-11 Komagata

Taitoh-ku Tokyo 111-0043 Japan

TEL:+81-3-3847-9751 FAX:+81-3-3847-9753

☐ Kyushu Office

Minamikindai Building 6F, 4-2-10 Hakataekiminami

Hakata-ku Fukuoka 812-0016 Japan

TEL:+81-92-476-3800 FAX:+81-92-476-3801

